


DO NOT SCALE

DIMENSIONS IN mm

METRIC

THIRD ANGLE



PROJECTION



P.C.B. HOLE DIM. ACTION PIN


DRILLED HOLE : 1,60 ± 0,025 mm
 FIN. HOLE : 1,39 to 1,54 mm
 AFTER REFLOW : 1,37 to 1,54 mm
 Cu-thks : 0,025 to 0,075 mm
 SnPb-thks : 0,004 to 0,010 mm

FOR LEADFREE PCB APPLICATIONS
 TESTS ARE NECESSARY

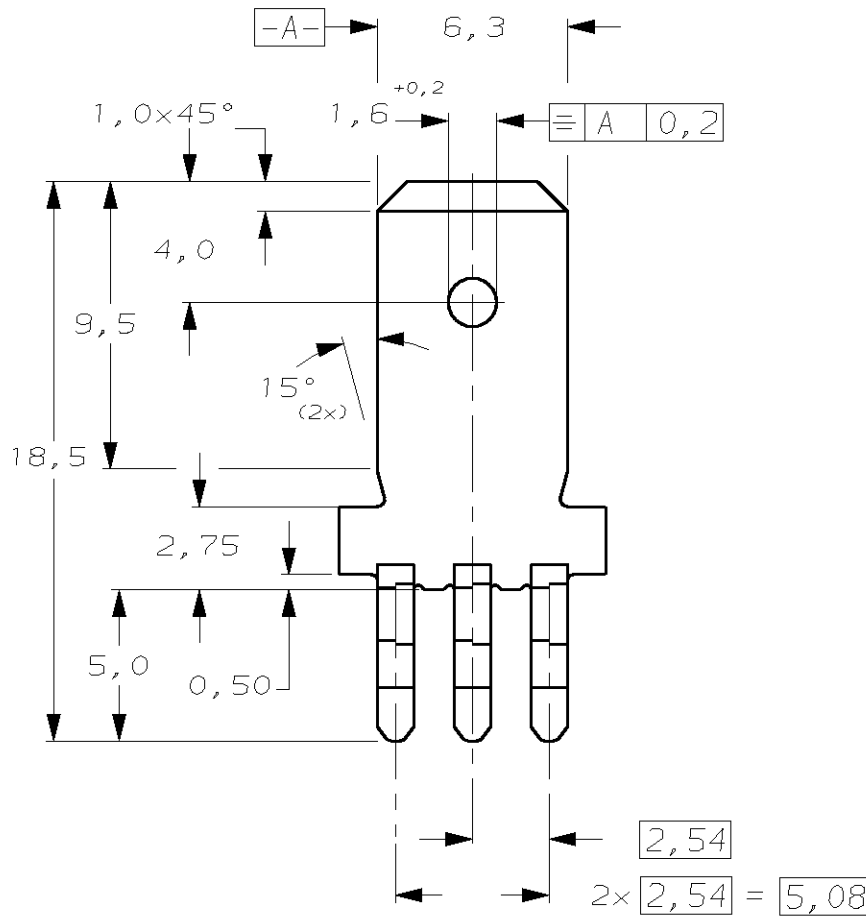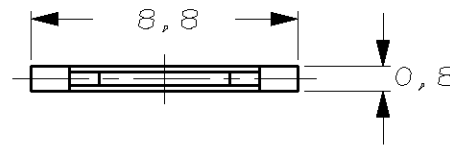

B1	NEW FINISH VERSION	HosseL	Bleicher	01 JUL 07	216843-3 MADE FROM 216842-5	PHOSPHORBRONZE	216843-3
B	LEADFREE PLATING, SPEC. ADAPTED; REVISION ADAPTED TO PART STATUS	MAH.	ZITZ	01 JUN 05	2,54µM MIN. SN; ALL OVER ACC. TO SPEC. 112-65-1	PHOSPHORBRONZE	216843-1
REV.	ECN-NO.	DRW.	APP.	DATE	FINISH	MATERIAL	PARTNUMBER

CUSTOMER DRAWING



AMP-HOLLAND B.V.
 's-Hertogenbosch, The Netherlands.

FOR REFERENCE ONLY
 WILL NOT BE UPDATED

THIS DRAWING IS UNPUBLISHED ~~RELEASED FOR PUBLICATION~~ = _____, 19-
 © COPYRIGHT 19- BY AMP-HOLLAND B.V.
 ALL INTERNATIONAL RIGHTS RESERVED.
 AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

DR.	DATE	WIRE RANGE	NAME	REV. DATE
R.v.Lokven	07.12.89	-	.250'' SERIES TAB WITH ACTION PIN,	D M Y
CHK.	DATE	INSUL. RANGE	FOR POSITIVE LOCK RECEPTACLE.	02 23 00
R.v.Lokven	03.01.90	-	(1,6-3,2 P.C. BOARD THICKNESS.)	
APP.	DATE	SIZE	SHEET	DWG. No.
L.v.Soest	03.01.90	A4	1 OF 1	216843
				REV. LTR.
				B1