MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
BAF1-2RN2-LH

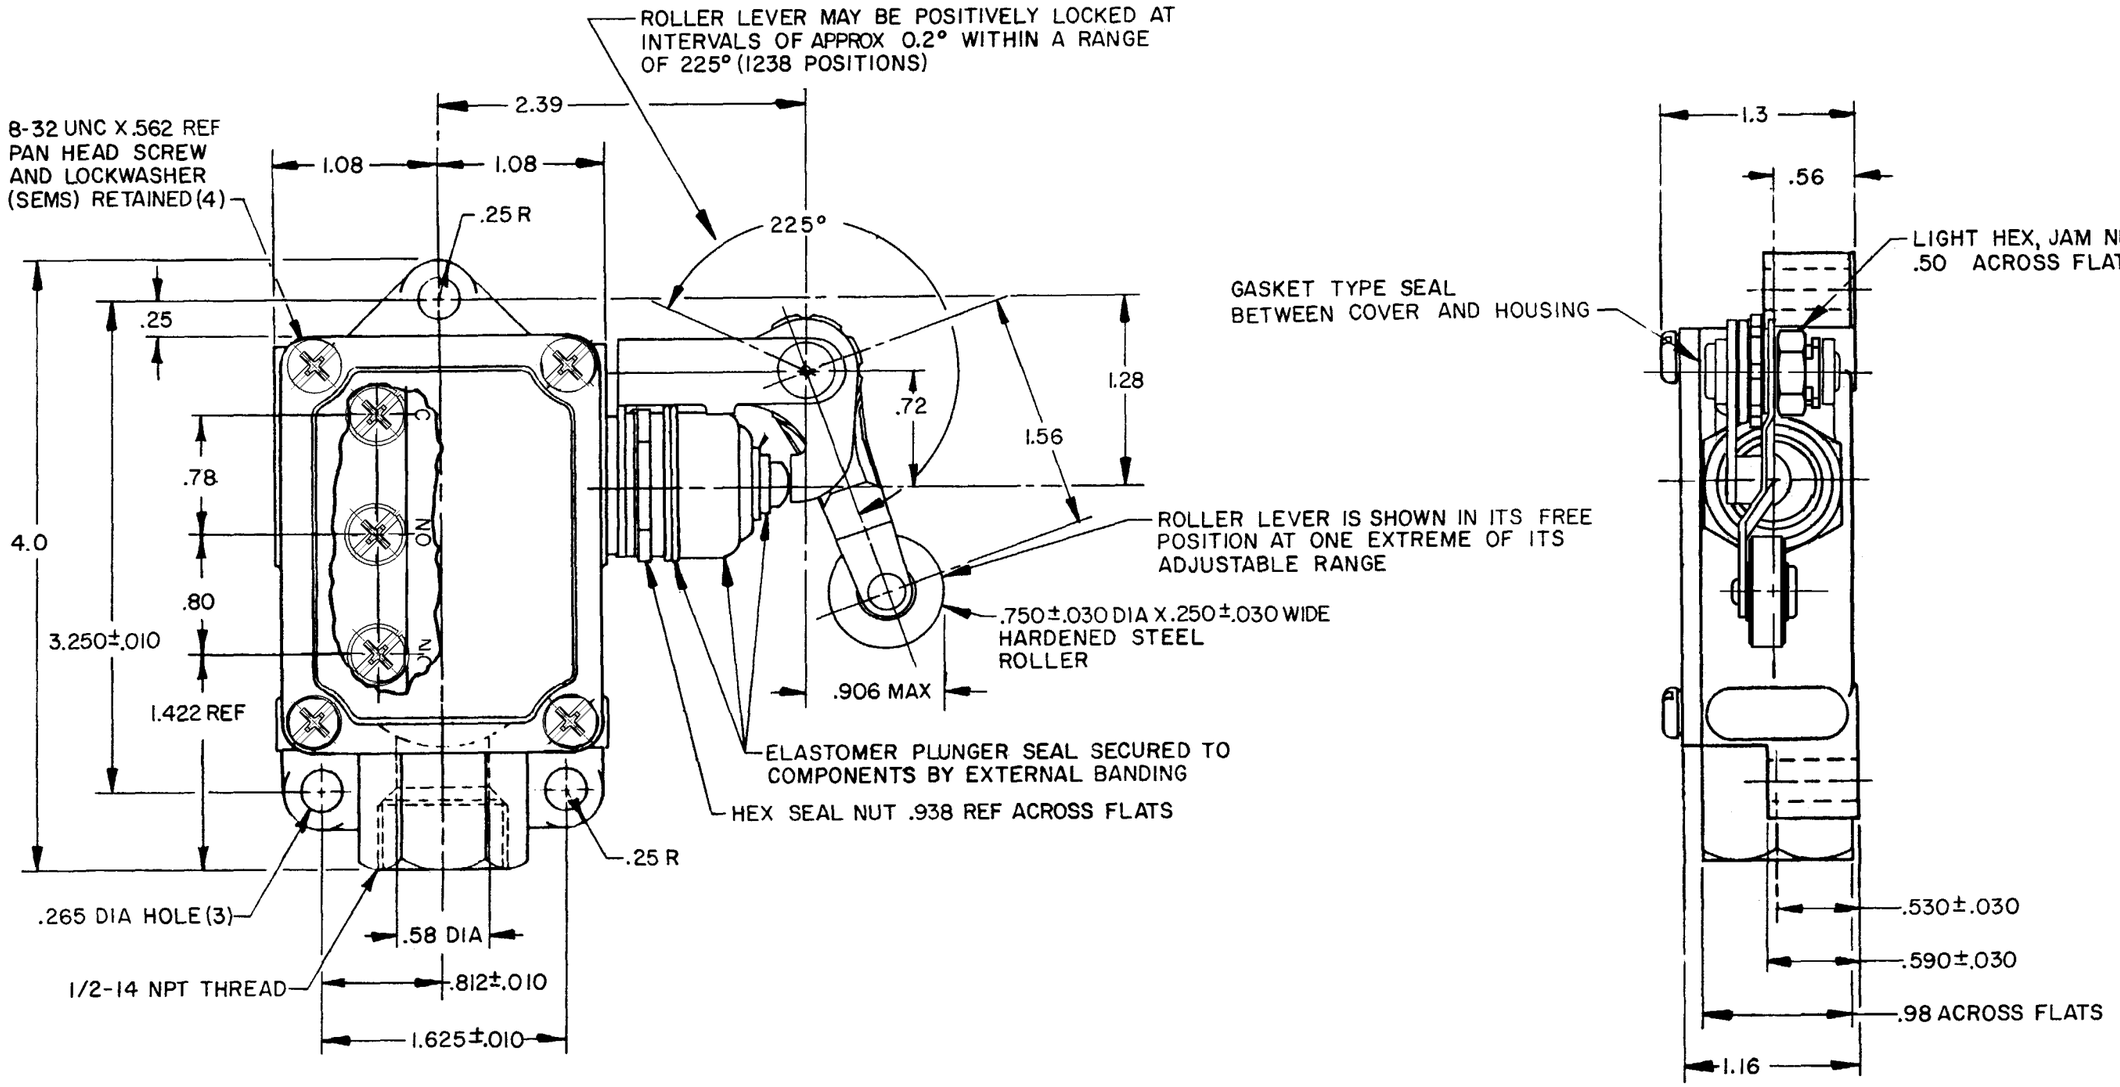

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .670 LB

CHARACTERISTICS	
OPERATING FORCE	2 LBS MAX
RELEASE FORCE	1/2 LB MIN
PRETRAVEL	.219 MAX
DIFFERENTIAL TRAVEL	.020 MAX
OVERTRAVEL	.250 MIN
BASIC SWITCH REPLACEMENT	BA-2R708-P7

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L23
20A 125, 250 OR 480 VAC
10A 125 VAC "L"
1HP 125 VAC, 2HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

NOTES
1 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET IN ANY POSITION AROUND AXIS OF PLUNGER
2 - 8-32 UNC X (.219) BINDER HEAD, COMBINATION, TERMINAL SCREWS AND CUPWASHERS

CATALOG LISTING BAF1-2RN2-LH
PAGE 1 OF 1
ISSUE 19 M
REPLACES
RELEASE NO.

REVISIONS

		CHECK
A	CO-73287-M GJW 9 MAY 95	
B	C081513B J A K 5 MAR 97	CHECK
		CHECK
		25 MAY 95 JJA
		CHECK
		9 MAY 95

DRAWN GJW 9 MAY 95
FORMTEK