



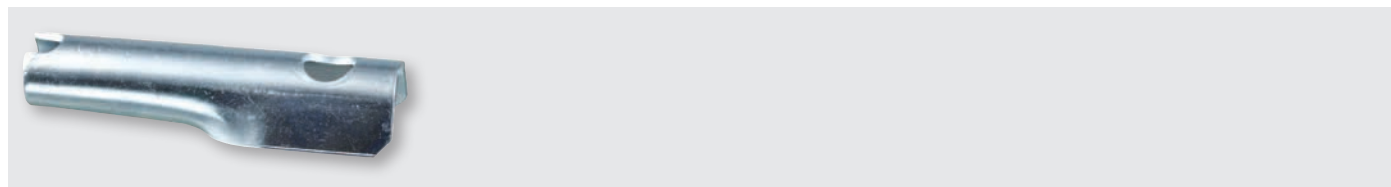




EXPRESS NAIL CEILING CLIP

- Express nail with eye for lightweight applications in concrete and masonry
- The nail sleeve is hammered in and expands its entire length in the hole

SUITABLE BASE MATERIALS




Cat No.	Description	 Length [mm]	 Drill Dia. [mm]	 Eye Diameter [mm]	 Pack Quantity	 Carton Quantity
DFM3130500	Express Nail-Ceiling Clip 8mmx42mm - Zinc Plated	42	8	5	100	800


RECOMMENDED LOAD, UNCRACKED 20/25 CONCRETE

Description	h_{nom} [mm]	h_1 [mm]	d_f [mm]	N_{rec} [kN]	V_{rec} [kN]
Express Nail Ceiling Clip	18	30	-	0.29	0.29


INSTALLATION

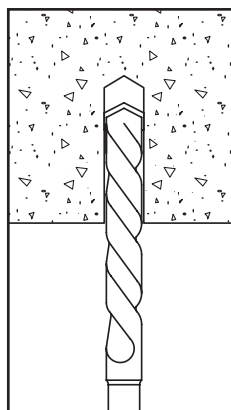


1.) Using the proper drill bit size, drill a hole into the base material to the required depth.

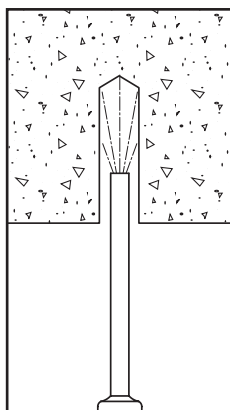

2.) Remove dust and debris from the hole using a hand pump or compressed air.

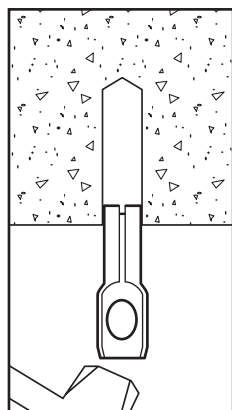

3.) Hammer the anchor into the hole.

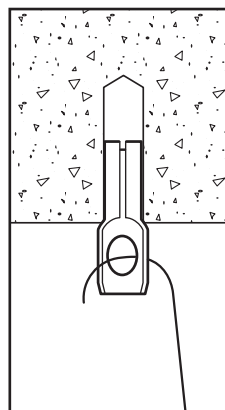

4.) Ensure the anchor is fully driven into the base material. The anchor is pre-expanded and ready for loading.

