
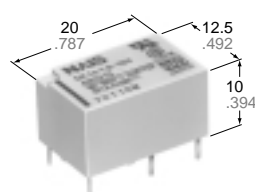


**NAIS****MINIATURE POWER RELAY****DK-RELAYS**

1a



1a1b

mm inch

**UL File No.: E43028****CSA File No.: LR26550**

- Large capacity in small size: 10 A 250 V AC (1a)
- High sensitivity: 200 mW nominal operating power
- High breakdown voltage  
4,000 Vrms between contacts and coil  
1,000 Vrms between open contacts
- Meeting FCC Part 68
- Sealed construction
- Latching types available

**SPECIFICATIONS****Contact**

Arrangement	1 Form A	2 Form A, 1 Form A 1 Form B
Initial contact resistance, max. (By voltage drop 6 V DC 1A)	30 mΩ	
Contact material	Gold flash over silver alloy	
Rating (resistive)	Nominal switching capacity	10 A 250 V AC 10 A 30 V DC
	Max. switching power	300 W, 2,500 VA
	Max. switching voltage	250 V AC, 30 V DC
	Max. switching current	10 A
UL/CSA rating	1/3 HP, 125, 250 V AC; 10 A 250 V AC, 30 V DC	1/4 HP, 125, 250 V AC; 8 A 250 V AC, 30 V DC
	Expected life (min. operations)	Mechanical 5×10 <sup>7</sup>
	Electrical (resistive)	10 <sup>5</sup> (10 A 250 V AC, 10 A 30 V DC)
		10 <sup>5</sup> (8 A 250 V AC, 8 A 30 V DC)

**Coil**

Minimum operating power	98 mW
Nominal operating power	200 mW

**Remarks**

- \*1 Measurement at same location as "Initial breakdown voltage" section  
 \*2 Detection current: 10 mA  
 \*3 Wave is standard shock voltage of  $\pm 1.2 \times 50\mu\text{s}$  according to JEC-212-1981  
 \*4 Excluding contact bounce time  
 \*5 Half-wave pulse of sine wave: 11ms; detection time: 10μs

**Characteristics**

Max. operating speed	20 cpm at rated load	
Initial insulation resistance*1	Min. 1,000 MΩ (at 500 V DC)	
Initial breakdown voltage*2	Between open contacts	1,000 Vrms
	Between contacts and coil	4,000 Vrms
Surge voltage between coil and contact*3	Min. 10,000 V	
Operate time*4 (at nominal voltage)	Max. 10 ms (Approx. 5 ms)	
Release time(without diode)*4 (at nominal voltage)	Max. 8 ms (Approx. 3 ms)	
Temperature rise (at nominal voltage)	Max. 40°C with nominal coil voltage and at 10 A switching current	
Shock resistance	Functional*5	Min. 98 m/s <sup>2</sup> {10 G}
	Destructive*6	Min. 980 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional*7	88.2 m/s <sup>2</sup> {9 G}, 10 to 55 Hz at double amplitude of 1.5 mm
	Destructive	176.4 m/s <sup>2</sup> {18 G}, 10 to 55 Hz at double amplitude of 3.0 mm
Conditions for operation, transport and storage*8 (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +65°C -40°F to +149°F
	Humidity	5 to 85% R.H.
Unit weight	1 Form A	Approx. 5.6 g .20 oz
	1 Form A 1 Form B, 2 Form A	Approx. 6 g .21 oz

\*6 Half-wave pulse of sine wave: 6ms

\*7 Detection time: 10μs

\*8 Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 49)

**TYPICAL APPLICATIONS ORDERING INFORMATION**

- Switching power supply
- Power switching for various OA equipment
- Control or driving relays for industrial machines (robotics, numerical control machines, etc.)
- Output relays for programmable logic controllers, temperature controllers, timers and so on.
- Home appliances

Ex. DK 1a — L2 — 12V

Contact arrangement	Operating function	Coil voltage
1a: 1 Form A 2a: 2 Form A 1a1b: 1 Form A 1 Form B	Nil: Single side stable L2: 2 coil latching	3, 5, 6, 9, 12, 24V

Note: Standard packing Carton: 50 pcs.; Case: 500 pcs.

**TYPES AND COIL DATA** at 20°C 68°F**Single side stable**

	Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Nominal operating current, mA (±10%)	Coil resistance, Ω (±10%)		Nominal operating power, mW		Maximum allowable voltage, V DC (at 65°C)
						Set	Reset	Set	Reset	
1 Form A	DK1a-3V	3	2.1	0.3	66.6	45	200	3.9		
	DK1a-5V	5	3.5	0.5	40	125	200	6.5		
	DK1a-6V	6	4.2	0.6	33.3	180	200	7.8		
	DK1a-9V	9	6.3	0.9	22.2	405	200	11.7		
	DK1a-12V	12	8.4	1.2	16.6	720	200	15.6		
	DK1a-24V	24	16.8	2.4	8.3	2,880	200	31.2		
1 Form A 1 Form B	DK1a1b-3V	3	2.1	0.3	66.6	45	200	3.9		
	DK1a1b-5V	5	3.5	0.5	40	125	200	6.5		
	DK1a1b-6V	6	4.2	0.6	33.3	180	200	7.8		
	DK1a1b-9V	9	6.3	0.9	22.2	405	200	11.7		
	DK1a1b-12V	12	8.4	1.2	16.6	720	200	15.6		
	DK1a1b-24V	24	16.8	2.4	8.3	2,880	200	31.2		
2 Form A	DK2a-3V	3	2.1	0.3	66.6	45	200	3.9		
	DK2a-5V	5	3.5	0.5	40	125	200	6.5		
	DK2a-6V	6	4.2	0.6	33.3	180	200	7.8		
	DK2a-9V	9	6.3	0.9	22.2	405	200	11.7		
	DK2a-12V	12	8.4	1.2	16.6	720	200	15.6		
	DK2a-24V	24	16.8	2.4	8.3	2,880	200	31.2		


**2 coil latching**

	Part No.	Nominal voltage, V DC	Set voltage, V DC (max.)	Reset voltage, V DC (max.)	Nominal operating current, mA (±10%)		Coil resistance, Ω (±10%)		Nominal operating power, mW		Maximum allowable voltage, V DC (at 65°C)
					Set	Reset	Set	Reset	Set	Reset	
1 Form A	DK1a-L2-3V	3	2.1	2.1	66.6	66.6	45	45	200	200	3.9
	DK1a-L2-5V	5	3.5	3.5	40	40	125	125	200	200	6.5
	DK1a-L2-6V	6	4.2	4.2	33.3	33.3	180	180	200	200	7.8
	DK1a-L2-9V	9	6.3	6.3	22.2	22.2	405	405	200	200	11.7
	DK1a-L2-12V	12	8.4	8.4	16.6	16.6	720	720	200	200	15.6
	DK1a-L2-24V	24	16.8	16.8	8.3	8.3	2,880	2,880	200	200	31.2
1 Form A 1 Form B	DK1a1b-L2-3V	3	2.1	2.1	66.6	66.6	45	45	200	200	3.9
	DK1a1b-L2-5V	5	3.5	3.5	40	40	125	125	200	200	6.5
	DK1a1b-L2-6V	6	4.2	4.2	33.3	33.3	180	180	200	200	7.8
	DK1a1b-L2-9V	9	6.3	6.3	22.2	22.2	405	405	200	200	11.7
	DK1a1b-L2-12V	12	8.4	8.4	16.6	16.6	720	720	200	200	15.6
	DK1a1b-L2-24V	24	16.8	16.8	8.3	8.3	2,880	2,880	200	200	31.2
2 Form A	DK2a-L2-3V	3	2.1	2.1	66.6	66.6	45	45	200	200	3.9
	DK2a-L2-5V	5	3.5	3.5	40	40	125	125	200	200	6.5
	DK2a-L2-6V	6	4.2	4.2	33.3	33.3	180	180	200	200	7.8
	DK2a-L2-9V	9	6.3	6.3	22.2	22.2	405	405	200	200	11.7
	DK2a-L2-12V	12	8.4	8.4	16.6	16.6	720	720	200	200	15.6
	DK2a-L2-24V	24	16.8	16.8	8.3	8.3	2,880	2,880	200	200	31.2


# REFERENCE DATA

## 1. 1 Form A type

### 1. Maximum operating power

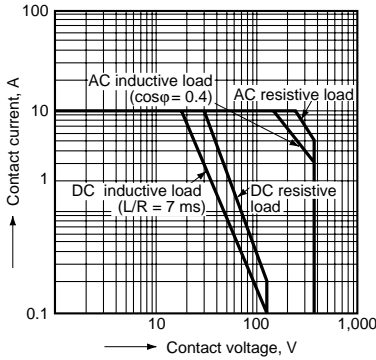


### 2. Life curve

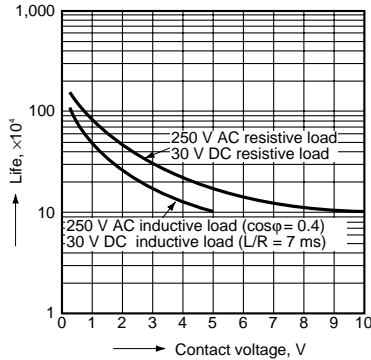


### 3. Operate/Release time

Sample: DK1a-24V, 5 pcs.

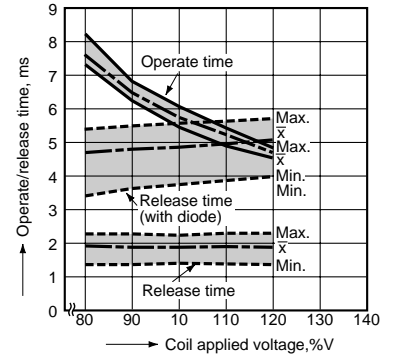

### 4. Coil temperature rise (at 30°C 68°F)


Sample: DK1a-12V, 5 pcs.

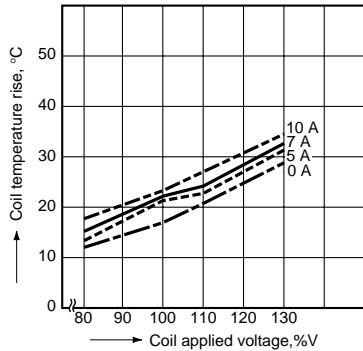

### 5. Ambient temperature characteristics


Sample: DK1a-24V, 6 pcs

Ambient temperature: -40°C to +80°C -40°F to +176°F

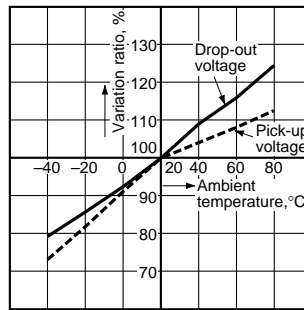


### 6. Operate/Release time (at 20°C 68°F)

Sample: DK1a-24V (50 pcs.)

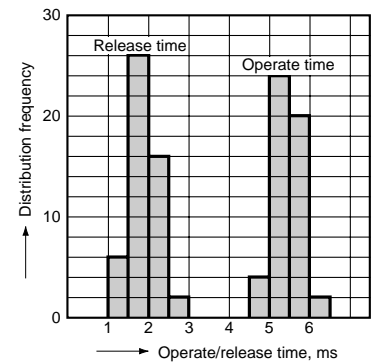


### 7. Contact resistance (at 20°C 68°F)

Sample: DK1a-24V (50 pcs.)

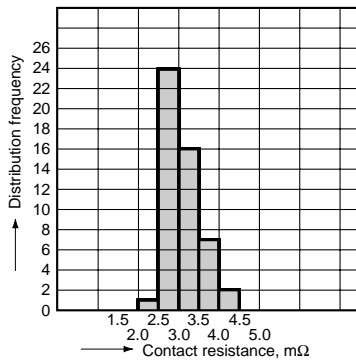


## 2. 1 Form A 1 Form B type, 2 Form A type

### 1. Maximum operating power

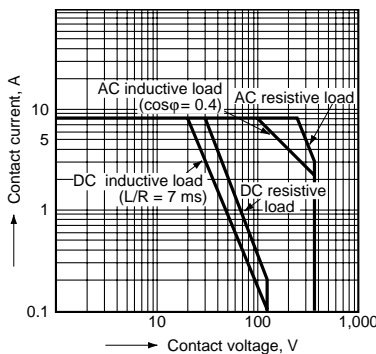


### 2. Life curve

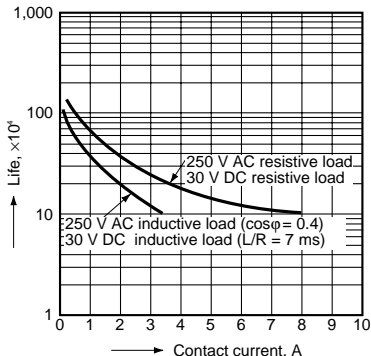


### 3. Operate/Release time (at 20°C 68°F)

Sample: DK1a1b-12V, 5 pcs.

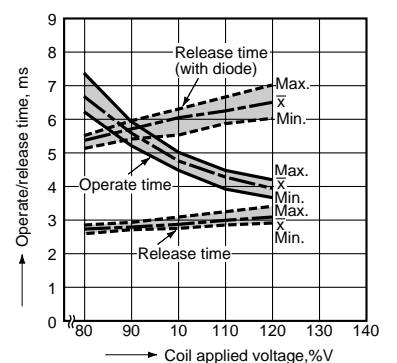


4. Coil temperature rise

Sample: DK1a1b-12V, 5 pcs.  
Ambient temperature: 20°C 68°F

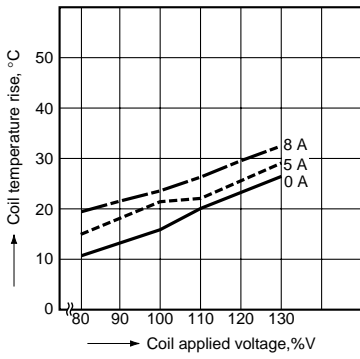


5. Ambient temperature characteristics

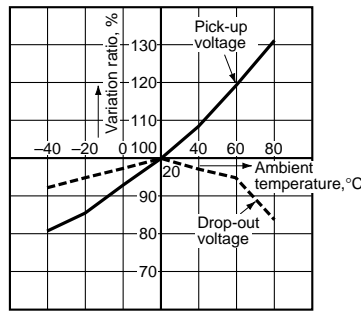


DIMENSIONS

mm inch

1. 1 Form A type

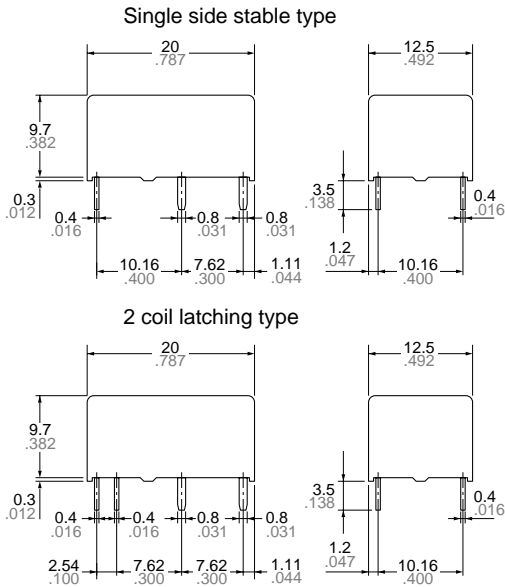


PC board pattern (Copper-side view)

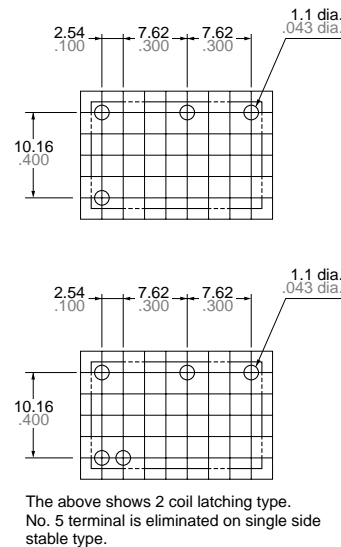


Schematic (Bottom view)

Single side stable (Deenergized condition)



2 coil latching (Reset condition)




Since this is a polarized relay, the connection to the coil should be done according to the above schematic.


General tolerance:  $\pm 0.3 \pm 0.012$

Tolerance:  $\pm 0.1 \pm 0.004$

2. 1 Form A 1 Form B type, 2 Form A type

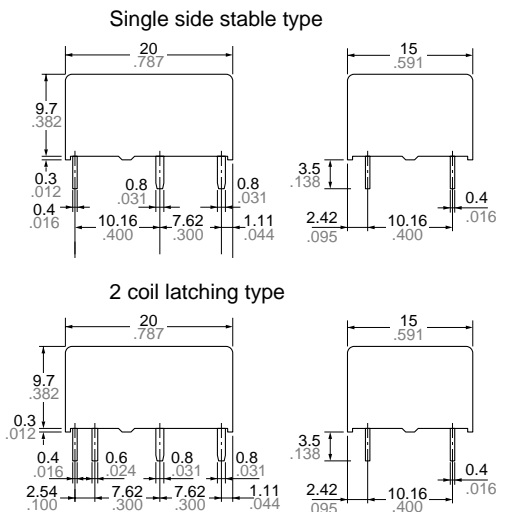


PC board pattern (Copper-side view)

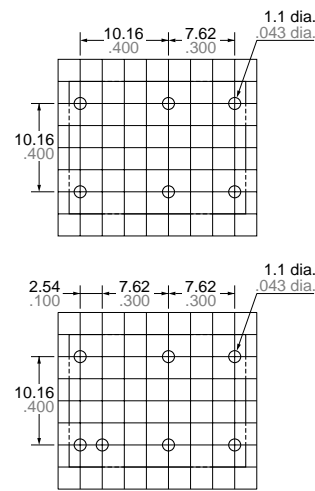


Schematic (Bottom view)

Single side stable (Deenergized condition)



2 coil latching (Reset condition)



Since this is a polarized relay, the connection to the coil should be done according to the above schematic.

General tolerance:  $\pm 0.3 \pm 0.012$

Tolerance:  $\pm 0.1 \pm 0.004$

# DK relay socket




## TYPES AND RELAY COMPATIBILITY

Socket \ Relay		1a		1a1b	
		Single side stable type	2 coil latching type	Single side stable type	2 coil latching type
1a	Single side stable type	DK1a-PS	DK1a-PSL2	—	—
	2 coil latching type	—	DK1a-PLS2	—	—
1a1b	Single side stable type	—	—	DK2a-PS	DK2a-PSL2
2a	2 coil latching type	—	—	—	DK2a-PSL2

## SPECIFICATIONS


Breakdown voltage	4,000 Vrms (Except the portion between coil terminals)
Insulation resistance	Min. 1,000 MΩ (at 500 V DC)
Heat resistance	150°C (for 1 hour)
Max. continuous current-carrying capacity	10 A

## DIMENSIONS

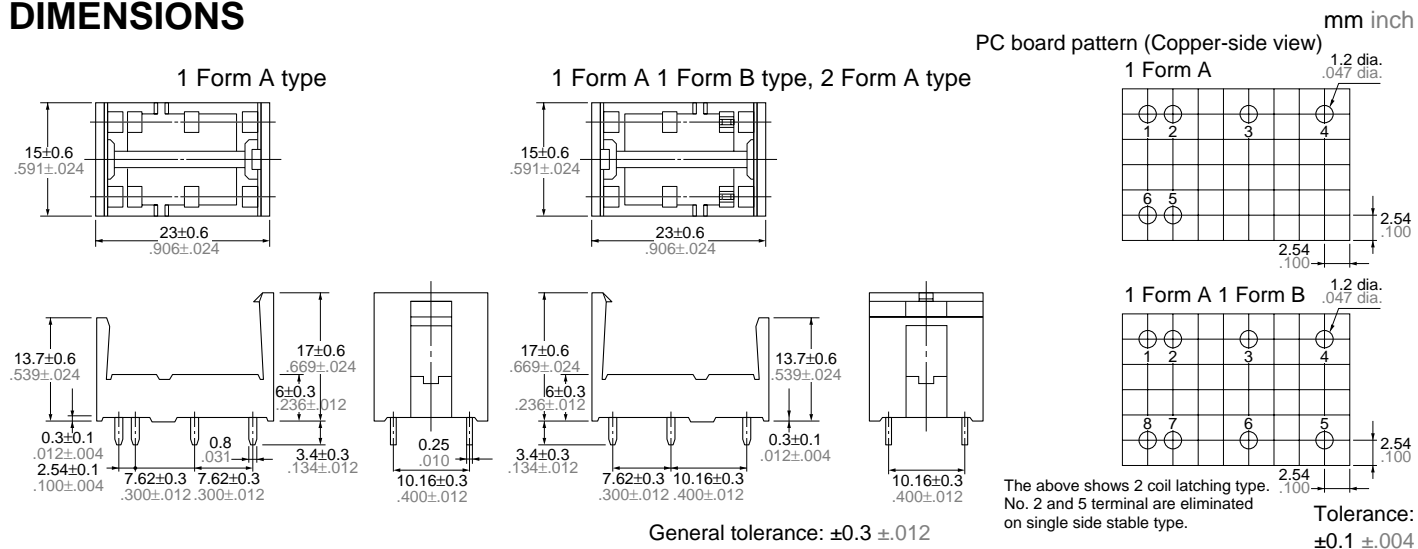


## FIXING AND REMOVAL METHOD


1. Match the direction of relay and socket.

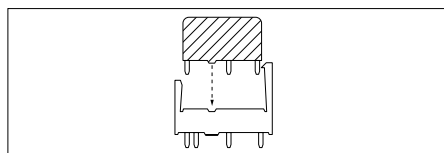


2. Both ends of the relay are to be secured firmly so that the socket hooks on the top surface of the relay.

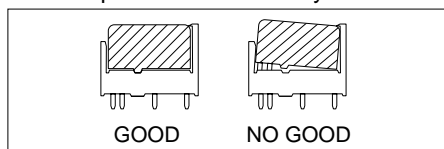

3. Remove the relay, applying force in the direction shown below.

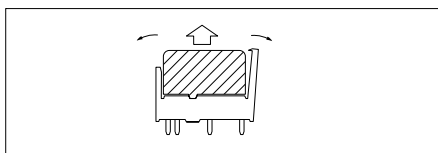


4. In case there is not enough space to grasp relay with fingers, use screwdrivers in the way shown below.

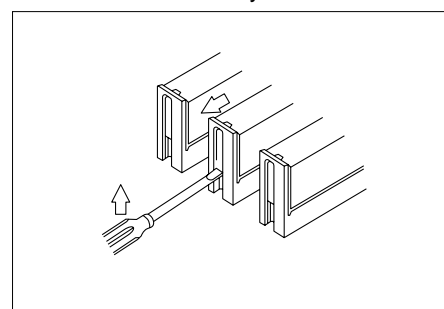

## NOTES

1. Phase synchronization of AC-load switching

In case of switching the contact synchronized with phase of load voltage, the life of contact might be shorter or contact failure might be caused. Please confirm this matter in the actual system in this case. If necessary, the phase control would be recommended.

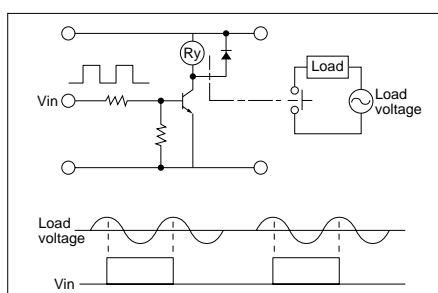

2. Soldering should be done under the following conditions:

- 250°C 482°F within 10s
- 300°C 572°F within 5s
- 350°C 662°F within 3s