

Common mode Noise Filter Array

Type: **EXC28CE**




■ Features

- 2 Common mode noise filters in one package
- Small size and low-profile
(L 2.0 mm×W 1.0 mm×H 0.5 mm)
- Reduce the common mode noise and reform the signal wave by high-coupled inductors
- Magnetic shield type
- Rigidly layered and sintered structure with high resistance to reflow heat and mounting reliability
- Lead, halogen, and antimony free
- RoHS compliant


■ Recommended Applications

- IEEE1394 data lines such as PCs, DVC, TV.
- LVDS data lines such as PCs, TV.


■ Explanation of Part Numbers

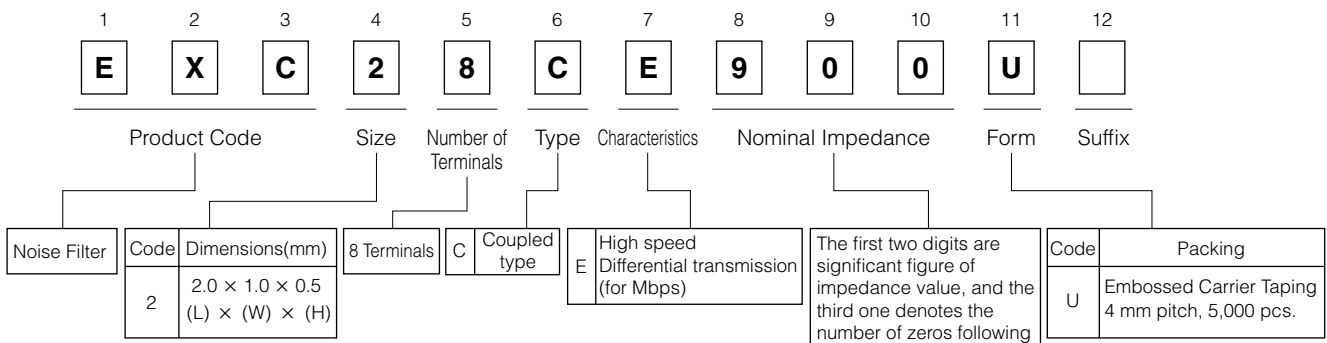


■ Construction

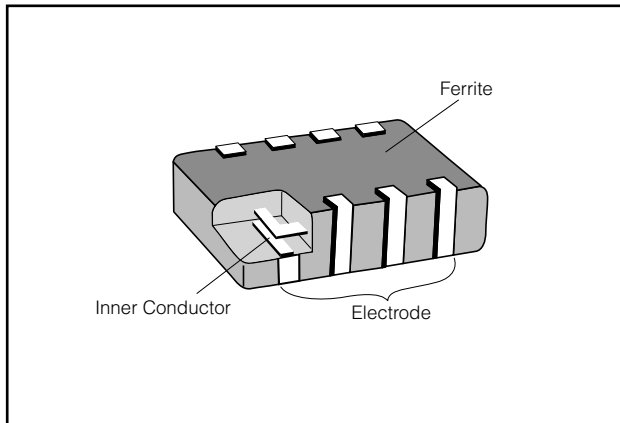

■ Dimensions in mm (not to scale)

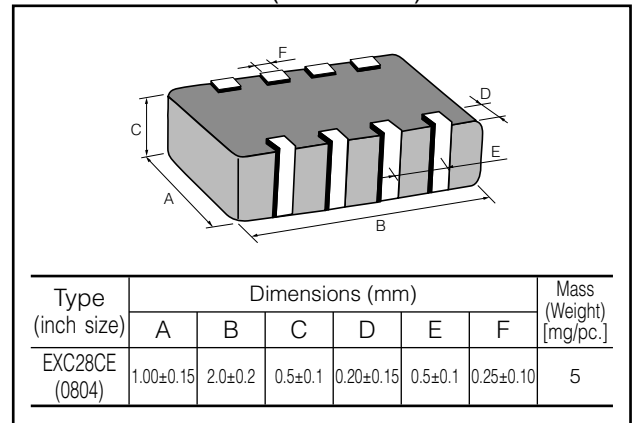

■ Circuit Configuration(No Polarity)

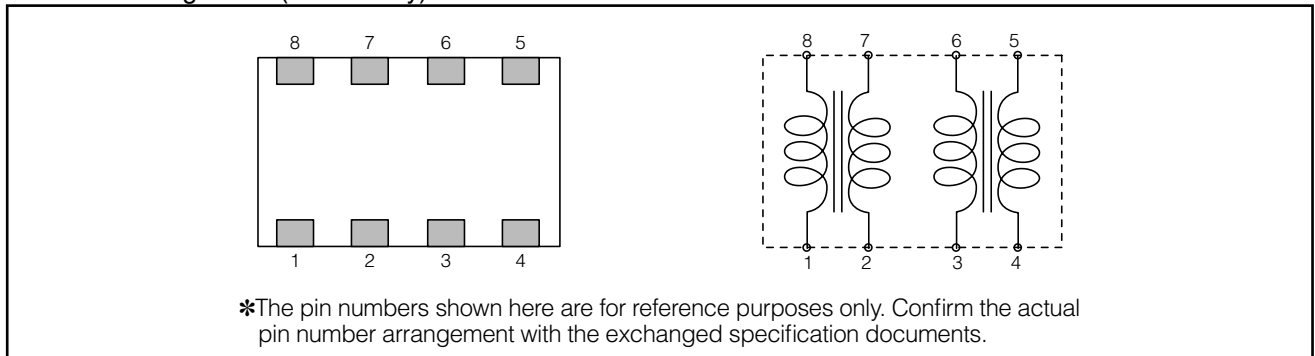


■ Ratings

Part Number	Impedance (Ω) at 100 MHz		Rated Voltage (V DC)	Rated Current (mA DC)	DC Resistance (Ω) max.
	Common Mode	Differential Mode			
EXC28CE900U	90 $\Omega \pm 25\%$	15 Ω max.	5	160	1.5
EXC28CE121U	120 $\Omega \pm 25\%$	18 Ω max.	5	140	2.0
EXC28CE201U	200 $\Omega \pm 25\%$	20 Ω max.	5	130	2.5
EXC28CE301U	300 $\Omega \pm 25\%$	30 Ω max.	5	80	5.0


● Category Temperature Range $-40\text{ }^{\circ}\text{C}$ to $+85\text{ }^{\circ}\text{C}$

■ Impedance Characteristics (Typical)


● EXC28CE900U

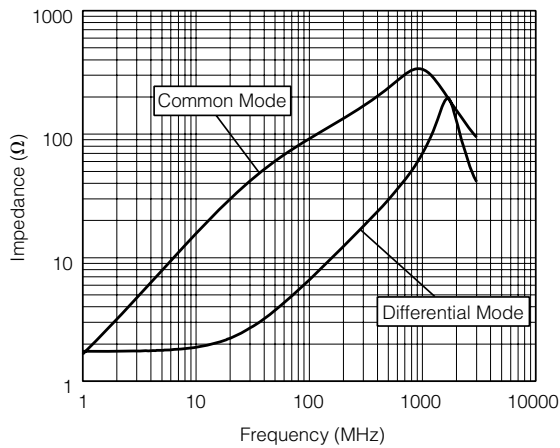


● EXC28CE121U

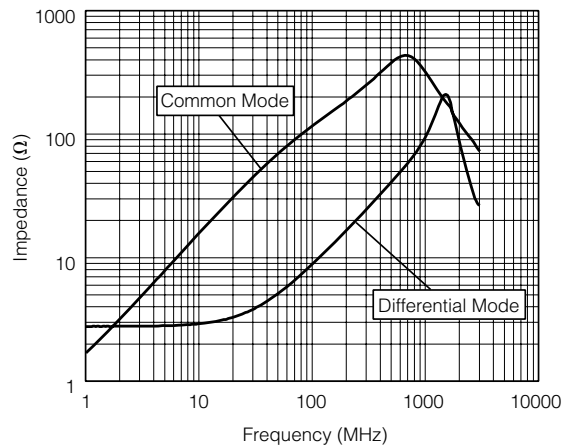

● EXC28CE201U

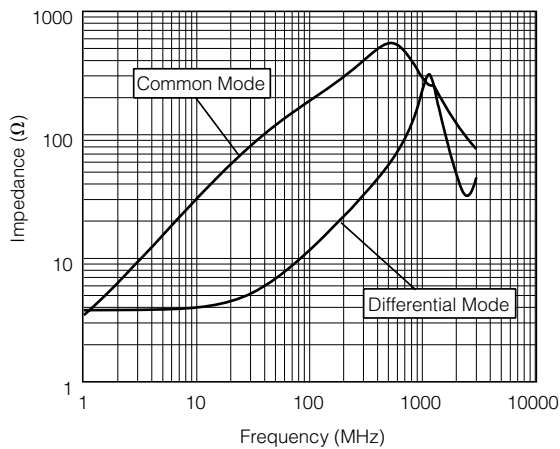


● EXC28CE301U

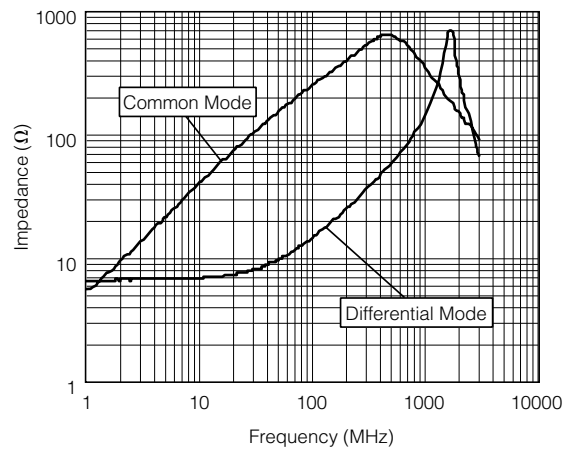


● Measurement Circuit

(A) Common Mode

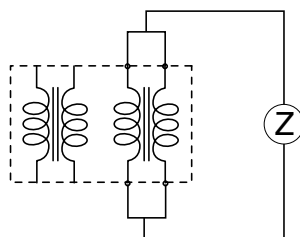

(B) Differential Mode

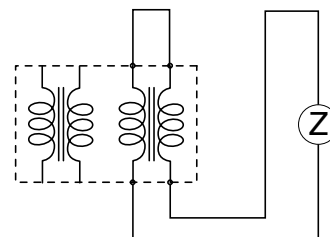

■ Packaging Methods, Land Pattern, Soldering Conditions and Safety Precautions

Please see Related Information