

0.333V OUTPUT SPLIT CORE CURRENT TRANSFORMERS

HOBUT

DESCRIPTION

The new range of mV split core current transformers is designed to fit into confined spaces whilst the primary conductor is still live. The family of CT's are compact design with a mechanical hinge for multiple opening and closing action.

APPLICATION

For connection into existing networks. Often for use with multifunction meters that have 0.333V input.




FEATURES

- High Sensitivity
- Class 1 accuracy
- Linearity with minimum phase shift
- 0.333V AC secondary output at rated current
- Mechanical hinge

TECHNICAL SPECIFICATION

- Input frequency 50 to 400Hz
- Maximum primary voltage 720V AC
- Dielectric withstand voltage 2.5Kv for 1 minute
- Operating temperature -15C to +50C
- 1 metre long flying lead twisted pair (22AWG)
- Construction – Ferrite core material
- Case nylon UL flame retardent rating 94V-0

DIMENSIONS (mm)

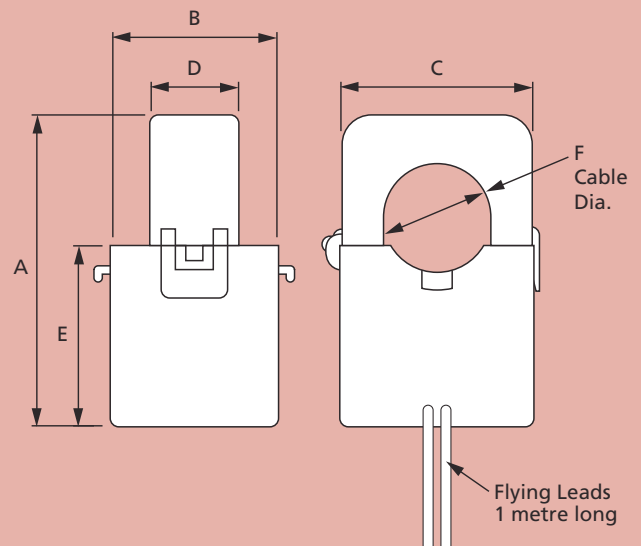

RANGE

CURRENT RATING	PART No.
30A	CTSCMWH30/0.333V
60A	CTSCMWH60/0.333V
120A	CTSCMWH120/0.333V
250A	CTSCMWH250/0.333V
500A	CTSCMWH500/0.333V

DIMENSIONS (mm)

A	B	C	D	E	F
41.7	26.4	28.7	15.0	25.3	10
41.7	26.4	28.7	15.0	25.3	10
53.0	31.0	29.9	18.2	32.0	16
69.6	38.6	43.5	20.4	41.0	24
83.5	51.2	51.2	26.1	60.0	35

Our policy is one of continuous development and therefore specifications may change without notice.

HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD
WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626
International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk
<http://www.hobut.co.uk>