


# AL1940



## IO-Link master with Modbus TCP interface

IO-Link Master CL MB 8P IP20

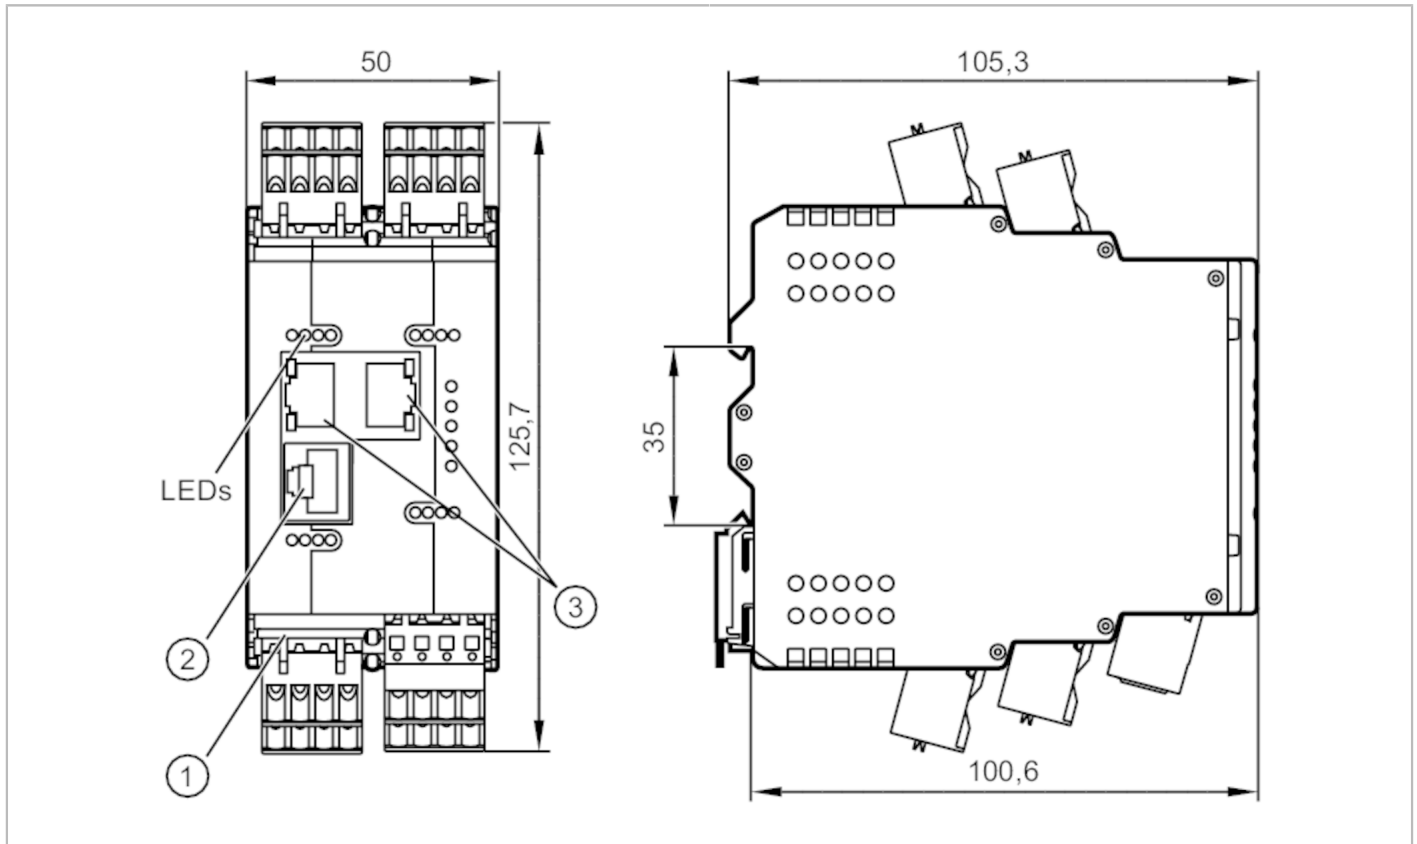

Application	
Application	I/O modules for use in the control cabinet
Electrical data	
Operating voltage [V]	20...30 DC; (US; to SELV/PELV)
Current consumption [mA]	300...3900; (US)
Protection class	III
sensor supply US	
Max. current load total [A]	3.6
Inputs / outputs	
Total number of inputs and outputs	16; (configurable)
Number of inputs and outputs	Number of digital inputs: 8; Number of digital outputs: 8
Inputs	
Number of digital inputs	8; (IO-Link Port Class A)
Switching level high [V]	11...30
Switching level low [V]	0...5
Digital inputs protected against short circuits	yes



## IO-Link master with Modbus TCP interface

IO-Link Master CL MB 8P IP20

Outputs	
Number of digital outputs	8; (IO-Link Port Class A)
Max. current load per output [mA]	200
Short-circuit proof	yes
Interfaces	
Communication interface	Ethernet; IO-Link
Ethernet - Internet of Things	
Transmission standard	10Base-T; 100Base-TX
Transmission rate	10; 100
Protocol	TCP/IP JSON
Factory settings	IP address: 169.254.x.x
	subnet mask: 255.255.0.0
	gateway IP address: 0.0.0.0
	MAC address: see type label
Ethernet - Modbus TCP	
Transmission standard	10Base-T; 100Base-TX
Transmission rate	10; 100
Protocol	Modbus TCP
Factory settings	IP address: 192.168.1.250
	subnet mask: 255.255.255.0
	gateway IP address: 0.0.0.0
	MAC address: see type label
IO-Link Master	
Transmission type	COM 1 / COM 2 / COM 3
IO-Link revision	1.1
Number of ports class A	8
Operating conditions	
Ambient temperature [°C]	-25...65
Storage temperature [°C]	-25...85
Max. relative air humidity [%]	90
Protection	IP 20
Tests / approvals	
EMC	EN 61000-6-2
	EN 61000-6-4
Mechanical data	
Weight [g]	329.5
Materials	housing: PA
Accessories	
Accessories (supplied)	COMBICON connectors: 9
Remarks	
Remarks	For further information please see the operating instructions.
Pack quantity	1 pcs.

# AL1940



## IO-Link master with Modbus TCP interface

IO-Link Master CL MB 8P IP20

### Electrical connection

#### voltage supply X31

1	GND (US)
2	GND (US)
3	+ 24 V DC (US)
4	+ 24 V DC (US)

#### IO-Link Port Class A X01...X08

1	Sensorversorgung (US) L+
2	digital input
3	Sensorversorgung (US) L-
4	C/Q IO-Link

### Electrical connection - Ethernet

Connector: RJ45

